



因为轻巧 所以灵活 因为灵活 所以可靠
FLEXIBLE BECAUSE OF LIGHTWEIGHT, RELIABLE BECAUSE OF FLEXIBLE

2013年10月版 October,2013Edition

DZD-2低架滑触线自动取电装置 DZD-2 series automatic telescopes arm for RTG conductor lines

主要特点

- 1、体积小，重量轻，仅同类产品的1/2，大大减少了悬重，使运行安全可靠；
- 2、四连杆结构，全电动控制，结构简单；
- 3、PLC控制，人机界面，操作直观简便；
- 4、能适应全气候工况，维护量少。

MAIN FEATURES

- 1, Small volume, light weight, only 1/2 weight of the similar product, greatly reducing the hanging weight, make the safe and reliable operation;
- 2, The four connecting rod structure, all electric control, simple structure;
- 3, PLC control, human-machine interface, easy operation;
- 4, To adapt to the climate condition, less maintenance.



上海振华重工（集团）宁波传动机械有限公司
宁波伟隆传动机械有限公司
ZPMC Ningbo Transmission Machinery Co.,Ltd.
Ningbo Weilong Transmission Machinery Co.,Ltd.



因为轻巧 所以灵活 因为灵活 所以可靠
 FLEXIBLE BECAUSE OF LIGHTWEIGHT, RELIABLE BECAUSE OF FLEXIBLE

取电小车主要技术参数 Automatic telescopic arm technical parameters


	名称 Item	参数 Parameter
1	额定工作电压 Rated voltage	460V、690V、960V
2	额定工作电流 Rated current	≤450A
3	滑移速度 Rated speed	≤±150m/min
4	伸缩总行程 Rated distance	0—1200mm
5	许用水平伸缩范围 Horizontal expansion and contraction quantity	≤±400mm
6	许用上下浮动范围 Vertical expansion and contraction quantity	≤±150mm
7	许用垂直平面倾转补偿量 Deflection compensation	≤±5°
8	外形尺寸:长 x 宽 x 高 Outline dimension:WxDxH	748mm x 640mm x 771mm
9	重量 Weight	70kg

滑线架优势:

- 1、因小车轻巧, 可使滑线架配置同步轻巧, 节约投入成本;
- 2、滑线架增设防雨罩, 能使滑触线绝缘性能增强, 不易老化, 同时可作RTG纠偏感应板;

Bus bar frame advantage :

- 1、Because of telescopic arm light, can make the bus bar frame light, save the cost ;
- 2、Add the rain cover on the bus bar frame, improve Insulation performance, at the same time, Can be used for RTG correction induction plate;

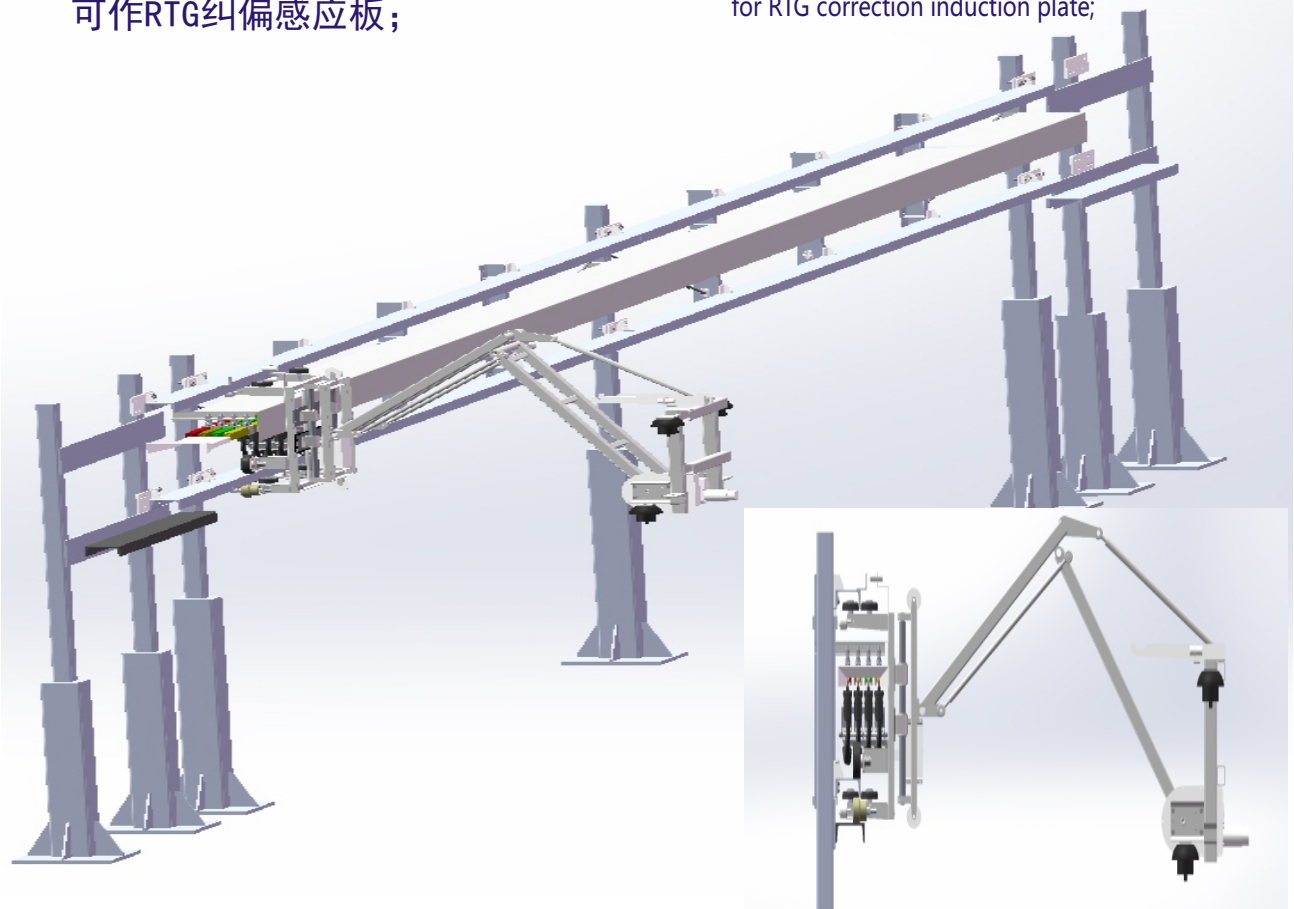

地址: 宁波市东钱湖工业园区(莫枝北路505号)

Address: No.505, Mozhi north road, Dongqianhu industry zone, Ningbo city. 服务热线Service tel:(86)574-88373131

电话Telephone: (86)574-83066266 88372266 88497976

传真Fax: (86)574-88372264

电子信箱Email: weilong@weilongme.com.cn

公司主页Website : http://www.weilongme.com.cn